



- NOTES-  
UNLESS OTHERWISE SPECIFIED:
1. REMOVE ALL BURRS AND SHARP EDGES, .010 R OR CHAMFER
  2. FINISH-  $63\sqrt{\text{V}}$  REQUIRED ALL OVER.
  3. CLEAN AND DEGREASE ALL SURFACES
  4. MATERIAL: ITEM 1 = OFHC COPPER, 0.125" THICK.
  5. MATERIAL: ITEM 2 = GOLD, 0.025" THICK, 99.99% PURITY
  6. ITEM 2 TO BE ONE CONTINUOUS SHEET PRIOR TO BONDING TO COPPER SHELL.
  7. CONDUCTIVE EPOXY BOND, GOLD-TO-COPPER

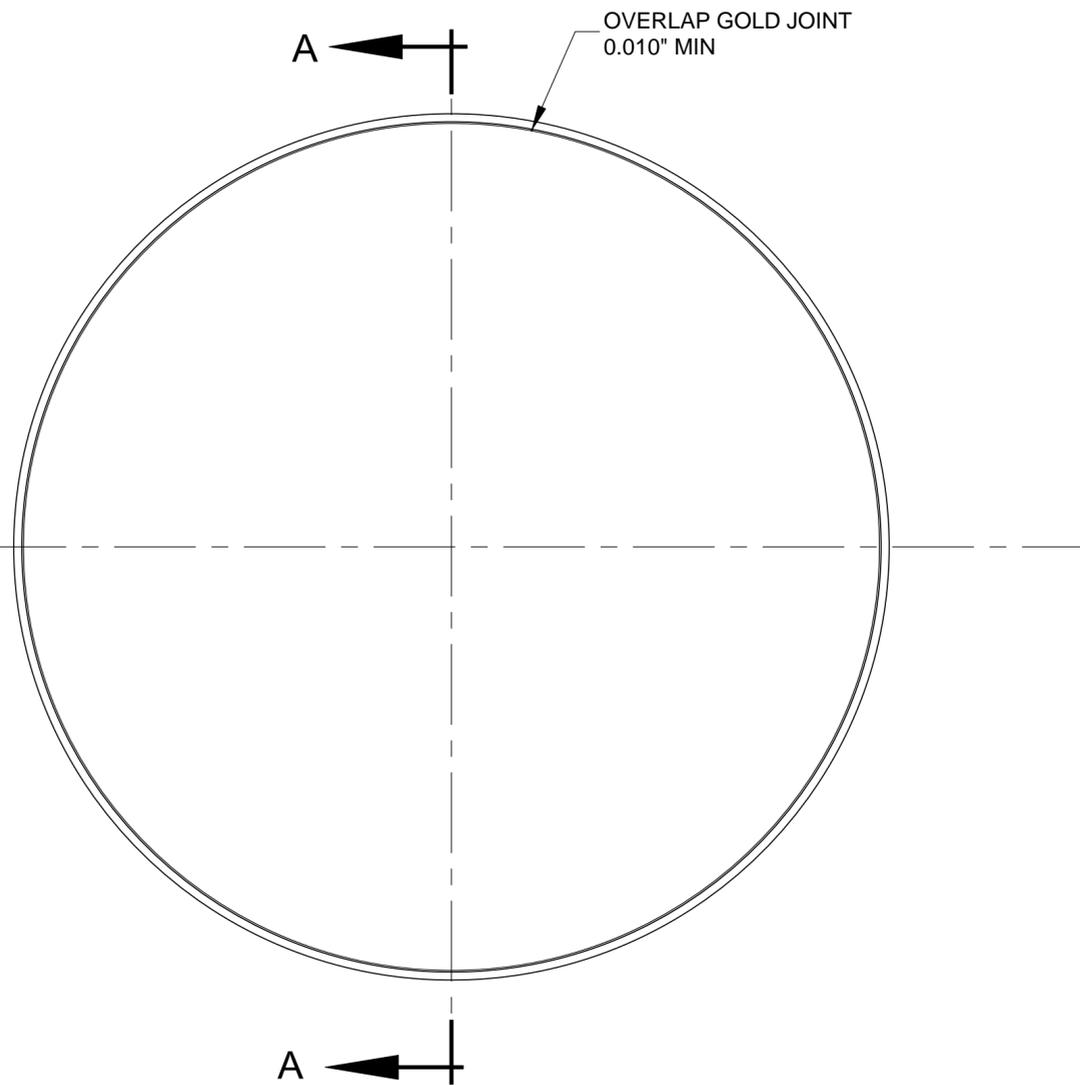

VIEW A-A

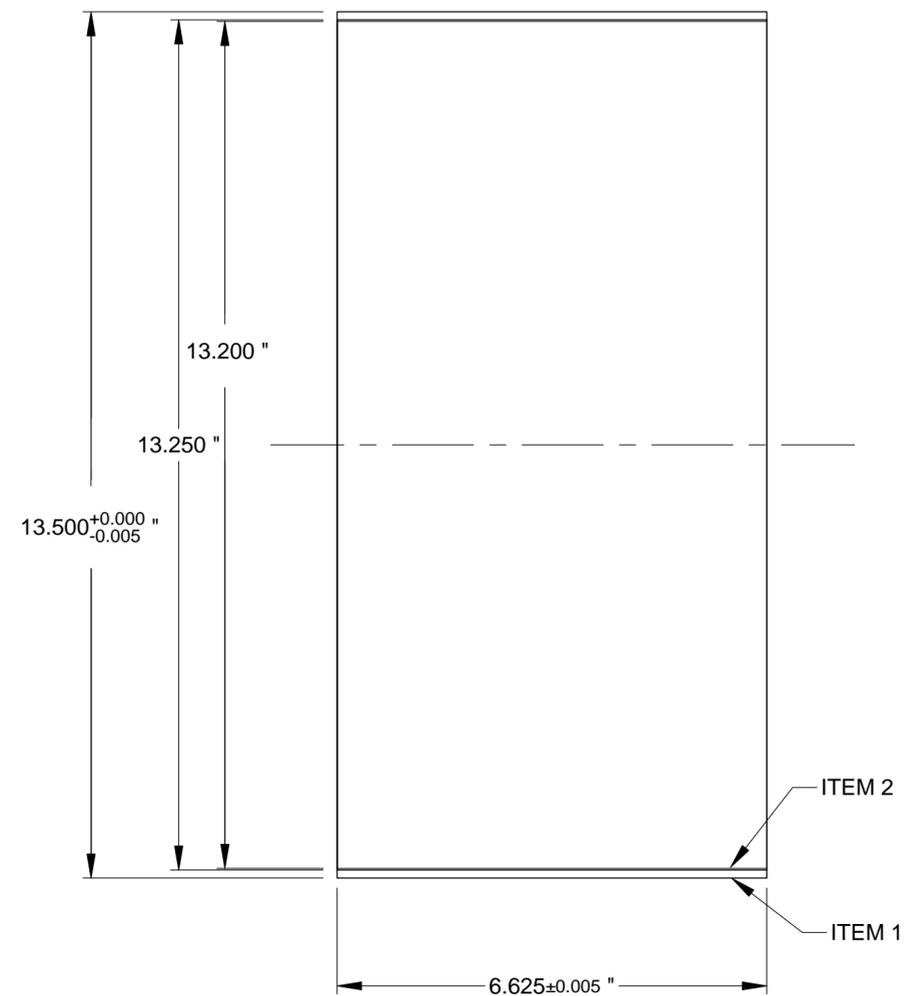

		<b>GODDARD SPACE FLIGHT CENTER ASTROPHYSICS SCIENCE DIVISION</b>		
		TITLE <b>TARGET, HOLLOW CATHODE, 13.5" HC-18C SPUTTERING SYSTEM</b>		
DESIGNER	C. ODELL	SIZE	C GC	DWG NO 2029250
CODE	660	PHONE	6-4479	SCALE 1:2
		27 FEB 2007		SHEET 1 OF 1
				REV -