


Mechanical Interface for Double A Diode Package

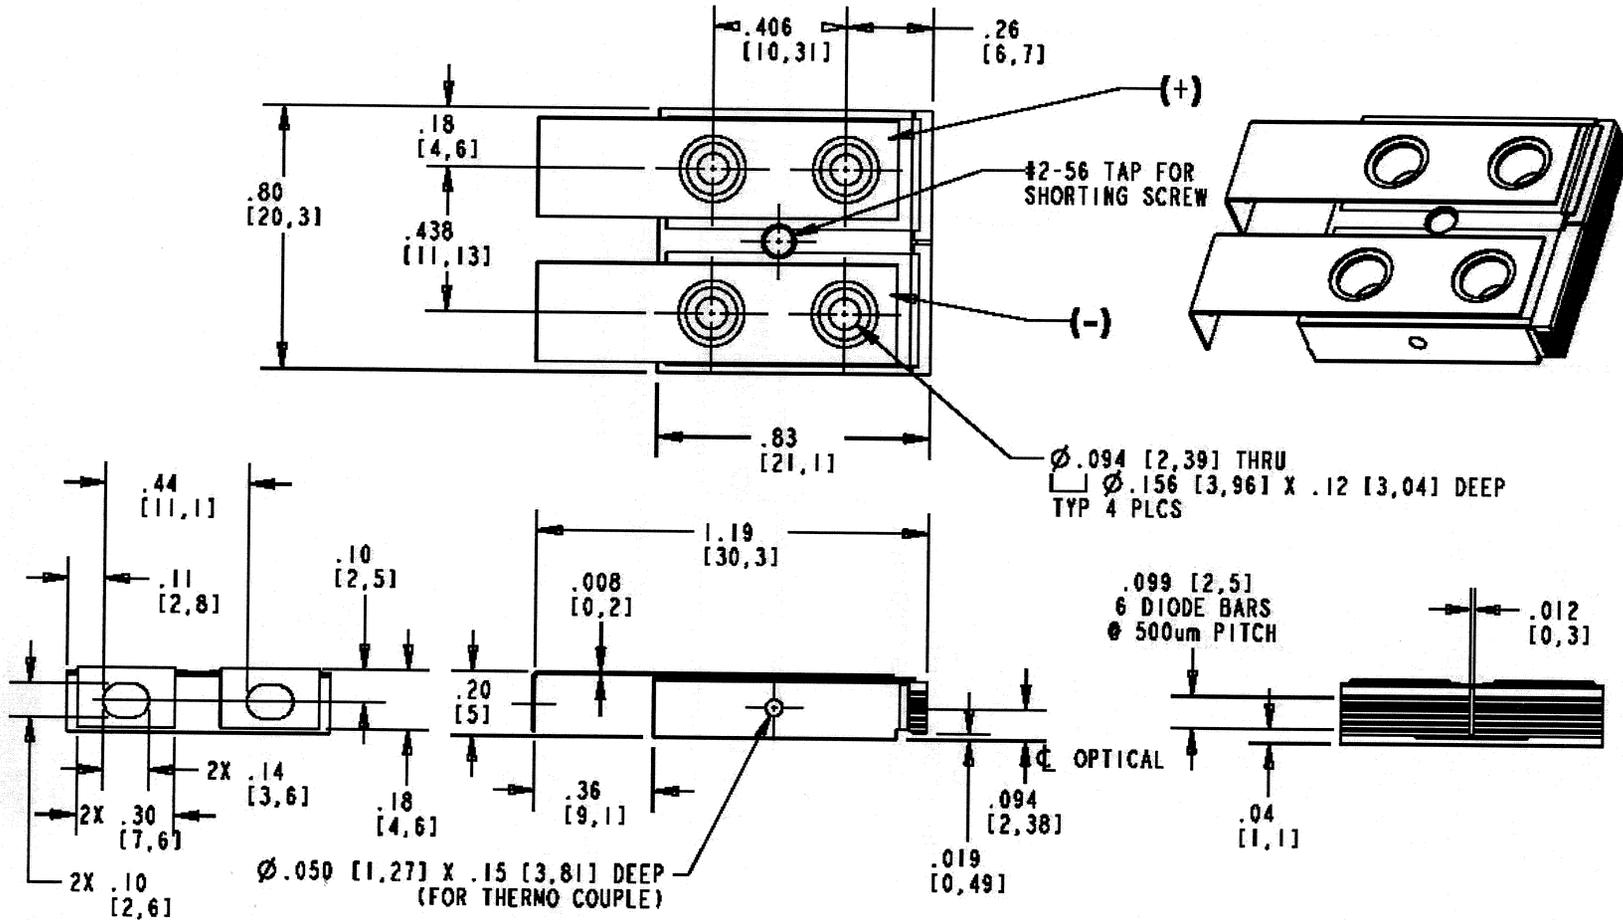

Notes:

- General Tolerances unless noted:
 - $x.x = \pm 0.1$
 - $x.xx = \pm 0.01$
 - $x.xxx = \pm 0.005$
- Bottom mounting surface of diode shall be polished to 4-microinch finish.
- The above diode package was previously designed and built under a government contract