

## NNA144495125Q-ATJ Additional Information

### NNA144495125Q-ATJ Photos



Figure 1: Overall View

Motor  
Mounting Bolt  
Pattern

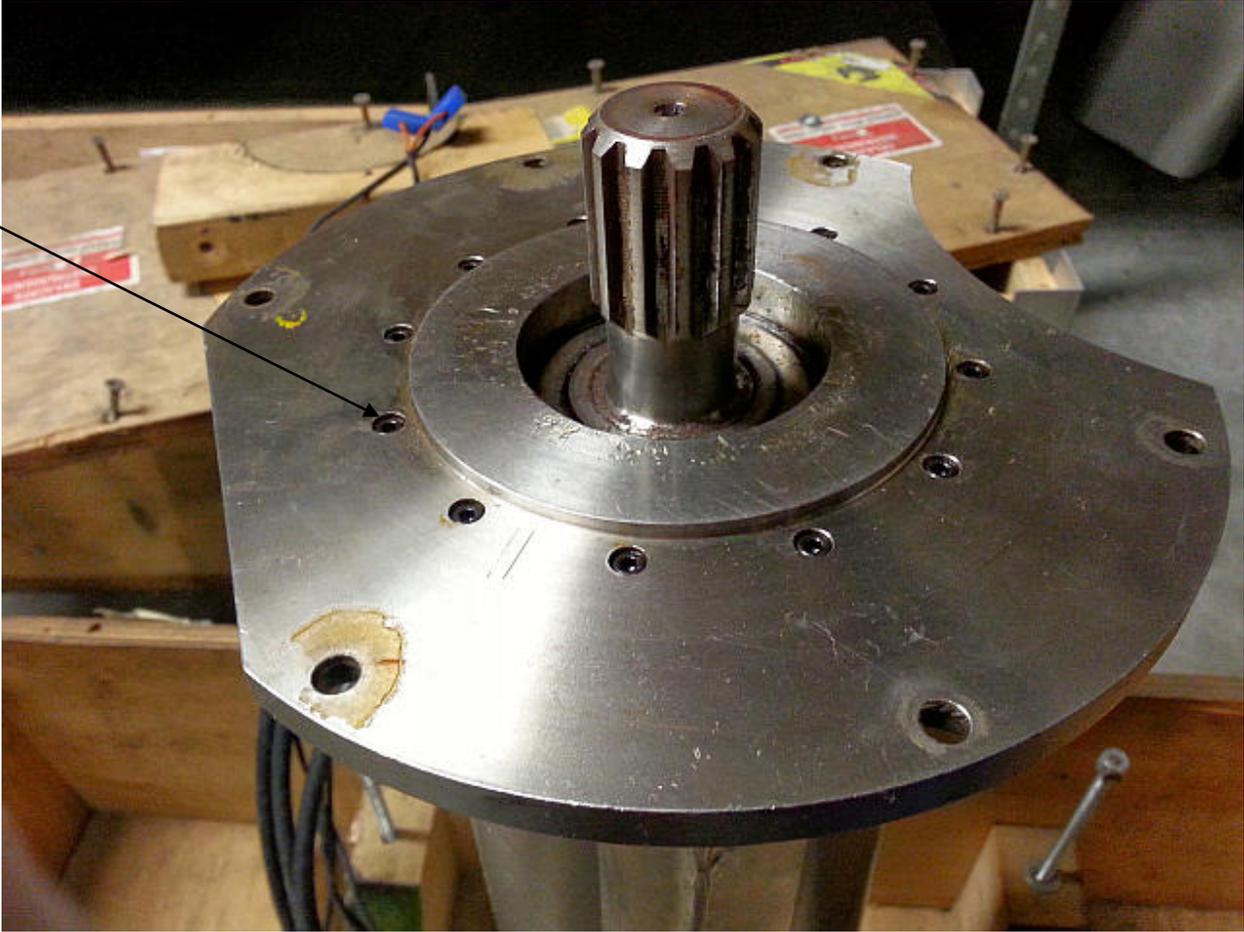


Figure 2: Power End with mounting Flange. Bolt pattern indicated with arrow. Flange shown not required.

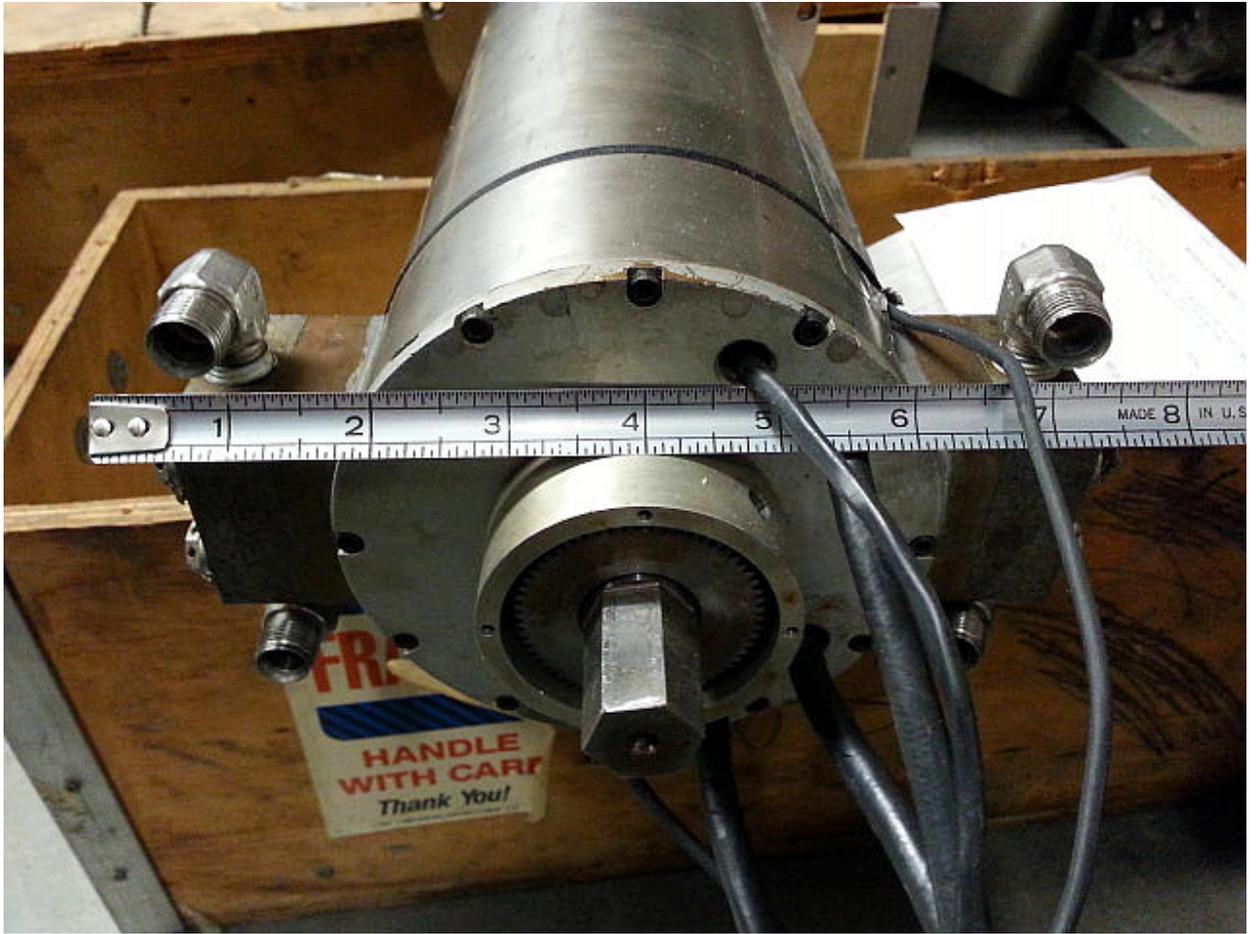


Figure 3: Non-Power End

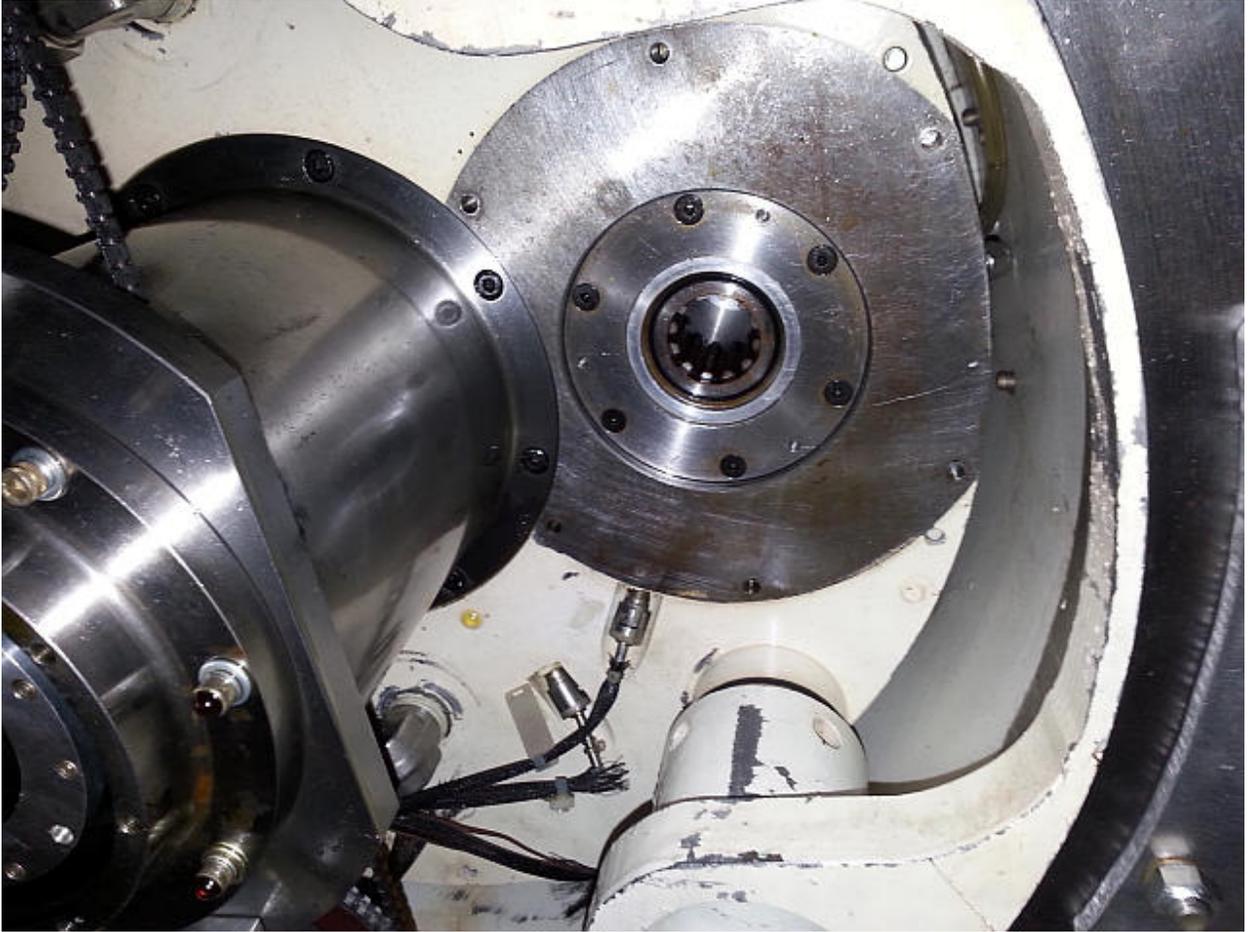


Figure 4: RWTS Motor Mounting Bay Viewed from Below (no motor installed)

Note: the cylinder on the left side is the instrumentation slip ring which cannot be removed. The motor must be installed using the flange (shown in Figure 2) and must remain within specified size criteria (5in diameter cylindrical section) in order to fit next to the slip ring mount shown.

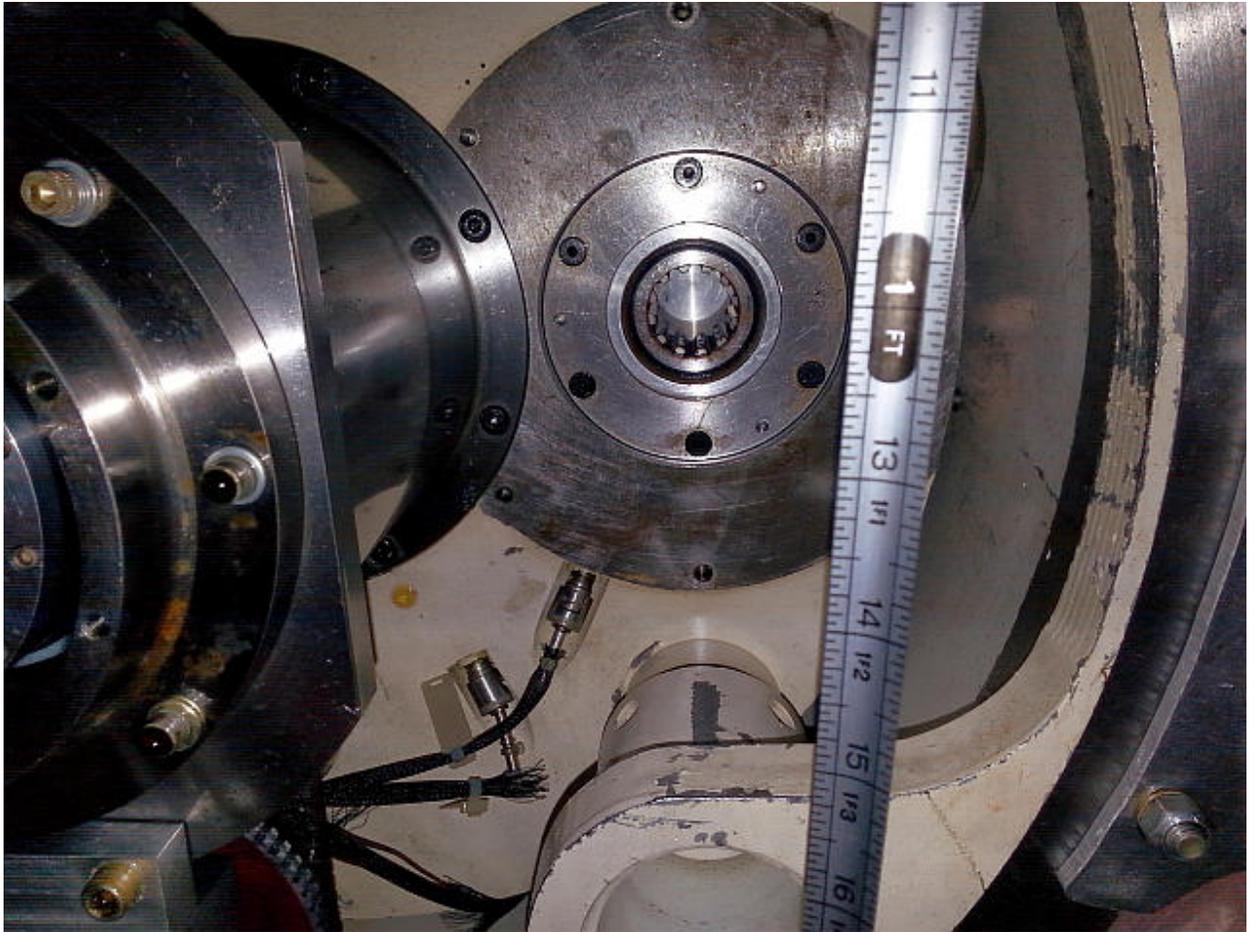


Figure 5: RWTS Motor Mounting Bay Viewed from Below with ruler for reference (no motor installed) The ruler is placed approximately 10 inches from the surface of the transmission where the flange is mounted.